



Fall Protection

3M™ Fall Protection
Welders Range.

**Complete safety
range for workers
at height in high
heat environments.**



www.3M.com/FallProtection

3M™ Fall Protection Welders Range.

Fire and sparks are a major concern in jobs such as welding, cutting, electrical maintenance and other high temperature applications. Keeping safe requires special materials to resist these hazards.

The 3M™ Fall Protection Welders range is specifically designed to resist the potential heat damage experienced in these applications. Featuring highly durable heat resistant & flame retardant Modacrylic over Kevlar® webbing and a lightweight design providing the ideal solutions for welding at height.



Our Fall Protection range for Welders includes:



Fall Arrest Harnesses



Lanyards



Self-Retracting Lifelines (SRL)

3M™ Protecta® Welders Harnesses

Stay safe and protected when working at height with 3M™ Protecta® Welders Harnesses.


Our welders harness is specifically designed to resist potential heat damage experienced in welding applications. Highly durable, heat resistant and flame retardant webbing combined with a lightweight design provides the ideal body support solution for welding at height.

Specifications

- Webbing: Modacrylic over Kevlar®, 45 mm
- Stitching: High strength Kevlar® thread
- Breaking Strength: > 2600daN
- Buckles: High strength zinc-plated steel pass through
- D rings: Zinc plated wrought steel
- CE EN361

Harness sizing.

Protecta® Fall Arrest Harness Sizing Chart.

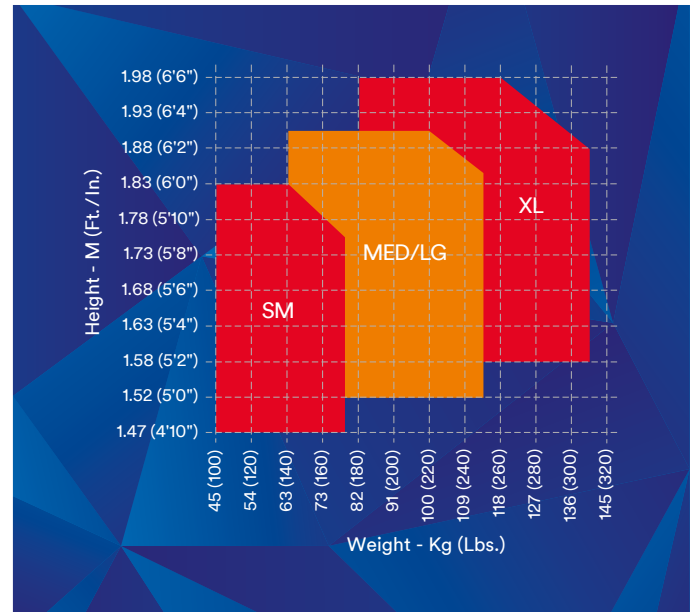

5 Points of Adjustment

- Ideally adapts to your body
- Greater comfort and enhanced safety

Torso Adjusters

- Simple pull down adjustment helps provide a better fit
- Spare webbing stored in hip strap

Modacrylic Kevlar® webbing

- Heat resistant and flame retardant
- 370°C char temperature

Pass Through Steel Buckles

- Simple, safe and fast connection



Large Rear D Ring

- Easier to connect
- Reduced risk of roll out

Fall Indicators


- Easy inspection, enhanced safety

Covered Labels

- Protect important information for the life of the harness

Weight Capacity

- 140 kg

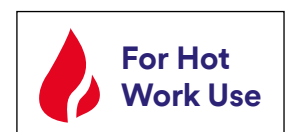

3M™ Protecta® Welders Harness



Best Seller
1161232

	↔	🔗	🔗	📊 kg
1161231/186041-S	S	QC	QC	1.35
1161232/186041-ML	M/L	QC	QC	1.42
1161233/186041-XL	XL	QC	QC	1.50

3M™ Protecta® Welders Harness



	↔	🔗	🔗	📊 kg
AB11312K/171810-S	S	PT	PT	1.20
AB11313K/171810-M-L	M/L	PT	PT	1.30
AB11314K/171810-XL	XL	PT	PT	1.40

3M™ Protecta® Welders Harness



	↔	🔗	🔗	📊 kg
AB10213K/183612-ML	M/L	PT	PT	1.30
AB10214K/183612-XL	XL	PT	PT	1.40

Suspension Trauma Safety Straps - Fire Resistant



	📊 kg
9505712/182761	0.14

Fire resistant suspension relief safety straps for full body harness.

3M™ Protecta® Welders Lanyards

Resistant

- Heat and char resistant shock pack cover that slips over shock pack, heat resistant up to 371°C
- Reinforced webbing with Nomex® /Kevlar® fiber to protect shock pack from getting burned

Safe

- Weight capacity: 100 kg
- Scaffolding hook: 23 kN
- Oval carabiner: 25 kN
- Meets CE standard EN355:2002

Ergonomic

- Different configurations, single and twin leg, that can be connected at foot level to meet your specific needs
- Lightweight design to improve comfort

3M™ Protecta® Welders Shock Absorbing Single Leg Lanyard with Scaffold Hook

	↔	🔗	🔗			🔗			CE
			🔗	🔗	🔗	🔗	🔗	🔗	kg
AE5215KBF/182757	1.5 m		🔗	17 mm	Ⓢ	🔗	50 mm	Ⓢ	1.05
AE5220KBF/182758	2.0 m		🔗	17 mm	Ⓢ	🔗	50 mm	Ⓢ	1.15

Single leg with Kevlar® webbing, with AJ514 steel twist lock carabiner 17 mm opening and AJ595 steel scaffold hook 50 mm opening



3M™ Protecta® Welders Shock Absorbing Twin Leg Lanyard with Scaffold Hook

	↔	🔗	🔗			🔗			CE
			🔗	🔗	🔗	🔗	🔗	🔗	kg
AE5315KBF/182759	1.5 m	■	🔗	17 mm	Ⓢ	🔗	50 mm	Ⓢ	1.05
AE5320KBF/182760	2.0 m	■	🔗	17 mm	Ⓢ	🔗	50 mm	Ⓢ	1.85

Twin leg with Kevlar® webbing, with AJ514 steel twist lock carabiner 17 mm opening and 2 AJ595 steel scaffold hooks 50 mm opening.



Self-Retracting Lifeline (SRL) specifically designed for welding, grinding and high heat applications.

Durable

Reinforced webbing with Nomex®/Kevlar® fiber to withstand sparks, weld splatter and other high heat exposure.

Versatile

Variety of DBI-SALA® Nano-Lok™ configurations, single and twin-leg, that can be connected at foot level to meet your specific needs.

Safe

Arc flashed to 8 calories (8 cal/cm²), for hot work use in applications like welding, grinding and torching. Meets or exceeds industry standards. CE EN360:2002.

Specifications

- Reinforced webbing with Nomex® / Kevlar® fiber*. Resist to sparks and weld splatters
- Arc-flashed resistant to 8 cal / cm²
- Certification: CE EN360 : 2002
- Capacity: 140 kg
- Connection level: Can be connected at foot level
- Length = 2 m

3M™ DBI-SALA® Nano-Lok™ SRL for Hot Work



CE
EN360

	←-----→					
3101522/171824	2 m			(A)	57 mm	1.50
3101522/183617	2 m	■		(A)	57 mm	3.20
3101525/171825	2 m			(S)	19 mm	1.66

Swivelling
Anchorage Loop

Direct to Harness Web
Anchorage Connector

Impact-Resistant
Housing

Impact Indicator


Hot Work Icon to
Quickly and Easily
Identify Hot Work
Products



Automatic
Quick-Activating
Fall Arrestor

Reinforced
Kevlar® Webbing

16 kN (3.600 lb)
Gate Hook



Harness icons.



Chest



Leg



Shoulders



Adjustable Chest



Adjustable Leg



Adjustable Shoulder



Pectoral D-Ring



Dorsal D-Ring



Sternal D-Ring



Fall Indicator



Pass Through Buckle



Quick Connect Buckle

Lanyard icons.

General:



Dimension



Kilogrammes



Certification

Type:



Material Type



Material: Aluminium



Material: Steel

Lanyards:



Twin Leg



Screw Carabiner



Size of gate opening



Connector: Lanyard End



Connector: User End



Scaffold Hook



Snap Hook

Self-Retracting Lifelines icons.



Lifeline Material



Connector Material



Carabiner



Rebar Hook



Snap Hook



Twin Leg

3M Belgium BVBA / SPRL

Hermeslaan 7
1831 Diegem
België / Belgique
Email: 3Msafety.be@mmm.com
www.3Msafety.be

3M Česko, spol. s r. o.

Divize ochrany zdraví
a bezpečnosti při práci
V Parku 2343/24
148 00 Praha 4
Tel: +420 228 885 175
www.3M.cz/OOPP

3M Danmark

Hannemanns Allé 53
2300 København S
Danmark
Email:
3M.CustomerCare.DK@mmm.com
www.3Msikkerhed.dk

3M Deutschland GmbH

Carl-Schurz-Straße 1
D - 41453 Neuss
Deutschland
Email: arbeitsschutz.de@mmm.com
www.3Marbeitsschutz.de

3M Eesti

Pärnu mnt. 158
11317 Tallinn, Eesti
Tel. +372 611 5911
Email:
3M.customerservice.EE@mmm.com
www.3M.ee

3M Espana, S.A.

Juan Ignacio Luca de Tena, 19-25
28027 Madrid
Espana
E-mail: ohes.es@3M.com
www.3M.com/es/seguridad

3M France

Boulevard de l'Oise
95006 Cergy Pontoise Cedex
France
Email: 3M-France-epi@mmm.com
www.3M.com/fr/securite

3M Greece

20 Kifissias Ave.
151 25 Maroussi
Athens, Greece
www.3M.com/gr/occsafety

3M Gulf Ltd

PO Box 20191, Dubai Internet City
Building @ 11
Dubai
United Arab Emirates
Tel: +971 4 3670 777
www.3Mae.ae

3M Hungária Kft.

Munkavédelmi üzletág
1117 Budapest, Neumann János u. 1/E
Hungária
Tel: +36 1 270 7777
www.3M.hu/munkabiztonsag

3M Israel

91 Medinat Ha'Yehudim St.
Herzeliya 4676673
Israel
Tel: 09-9615000
www.3Misrael.co.il

3M Ireland Limited

The Iveagh Building
The Park, Carrickmines
Dublin 18
Ireland
Email: ohes.helpline.uk@mmm.com
www.3M.co.uk/safety

3M Italia srl

Via Norberto Bobbio, 21
20096 Pioltello MI
Italia
Email: 3Msicurezza@mmm.com
www.3Msicurezza.it

3M Latvija

Kārļa Ulmaņa gatve 5,
Zemgales priekšpilsēta
Rīga, LV-1004
Lettland
Email:
3M.customerservice.LV@mmm.com
www.3M.lv

3M Lietuva

A. Goštauto g. 40A
LT-03163 Vilnius
Lietuva
Email:
3M.customerservice.LT@mmm.com
www.3M.lt

3M Nederland B.V.

Molengraaffsingel 29
2629 JD Delft
Nederland
Email: 3Msafety.nl@mmm.com
www.3Msafety.nl

3M Norge A/S

Taerudgata 16
2004 Lilestrøm
Norge
Email:
3M.CustomerCare.NO@mmm.com
www.3M.no/vern

3M Österreich GmbH

Kranichberggasse 4
1120 Wien
Österreich
www.3M.com/at/arbeitsschutz

3M Poland Sp. z o.o.

Aleja Katowicka 117
05-830 Nadarzyn
Poland
Tel: +48 22 739 60 00
www.3Mpolska.pl

3M Portugal

Rua do Conde Redondo, 98
1169-009 Lisboa
Portugal
www.3M.com/pt/seguranca

3M Russia

108811, Moscow, p. Moskovskiy
Kievskoe shosse, 22km, 6, bld.1
Tel: 8 800 250 84 74
www.3MRussia.ru

3M Saudi Arabia

Business Gate Building # 24 & 25
Zone C2 Cordoba District
P.O.Box 21840, Riyadh 11485
Saudi Arabia
Tel: 966 50 4494143
www.3M.com.sa

3M Slovensko s.r.o.

Polus Tower 2, Vajnorská 100/B
83104 Bratislava
Slovak Republic
Tel.: +421 2 4910 5211
Email: innovation.sk@mmm.com
www.3M.sk/OOPP

3M Suisse S.a r.l. / Schweiz GmbH

Eggstrasse 93
8803 Rüslikon
Suisse / Schweiz
www.3M.com/ch/safety

Suomen 3M Oy

Keilaranta 6
02150 Espoo
Suomi
Email: tilaukset@mmm.com
www.3M.fi/suojaimet

3M Svenska AB

Bollstanäsvägen 3
191 89 Sollentuna
Sverige
Email:
3M.CustomerCare.SE@mmm.com
www.3M.se/personskydd

3M Türkiye

Barbaros Mah. Mor Sümbül Sok.
No:7/3F 27-51 Nidakule Ataşehir
Güney 34746 Ataşehir/İstanbul
Türkiye
Tel: (90) 216 538 07 77
www.3M.com.tr

3M United Kingdom PLC

3M Centre
Cain Road, Bracknell
RG12 8HT
United Kingdom
Email: ohes.helpline.uk@mmm.com
www.3M.co.uk/safety

3M Ukraine LLC,

Horizon Park Business Center
12, M.Amosova str.
Kyiv, 03038
Ukraine
Tel: +38 044 490 57 77
www.3M.com.ua

**Fall Protection****Registered Offices:**

Capital Safety (Northern Europe) Limited
3M Centre, Cain Road
Bracknell, Berkshire, RG12 8HT, UK

Capital Safety Group (EMEA)

Le Broc Center, Bâtiment A, Z.1. 1re Avenue
– BP15, 06511 Carros Le Broc, Cedex, FRANCE

Phone: +33 (0)4 83 58 08 08
Email: informationfallprotection@mmm.com
Web: 3M.com/FallProtection

3M, DBI-SALA, Nano-Lok, Protecta are trademarks of 3M Company. Kevlar is a trademark or registered trademark of E.I. du Pont de Nemours and Company.

Registered address: 3M Centre, Cain Road, Bracknell, Berkshire, RG12 8HT. Registered in England and Wales No. 1918922.

Please recycle.
©3M 2019.
All rights reserved.
CC21600